


# GJXH-1,2,4B6

Indoor metal butterfly shaped introduction optical cable

## Cable cross-section

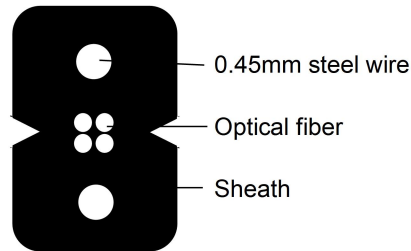

## Cable Specification

Item	Technology parameter		
	GJXH-1B6	GJXH-2B6	GJXH-4B6
Cable type	GJXH-1B6	GJXH-2B6	GJXH-4B6
Cable specification	3.0×2.0		
Fiber type	9/125 (G.657A2)		
Fiber counts	1	2	4
Fiber color	Red	Blue, orange	Blue, orange, green, brown
Sheath color	Black		
Sheath material	LSZH		
Cable dimension mm	3.0(±0.1)*2.0(±0.1)		
Cable weight Kg/km	Approx. 10.0		
Min. bending radius mm	10 (Static) 25 (Dynamic)		
Attenuation dB/km	≅ 0.4 at 1310nm, ≅ 0.3 at 1550nm		
Short term tensile N	200		
Long term tensile N	100		
Short term crush N/100mm	2200		
Long term crush N/100mm	1100		
Operation temperature °C	-20~+60		

## **Packing**

1Km/Roll/Box

Size: 32\*21.5\*32cm

Weight: 10KG