




# HG325N

1\*XPON+4GE+1POTS+WiFi 4 HGU ONT

**Key Features:**



ZTE+MTK Chipset  
High Performance Solution



XPON Dual Mode  
Automatically Access to  
EPON/GPON



WiFi IEEE802.11b/g/n  
2×2 5dBi Antenna  
Wide Coverage



Powerful Firewall




**Introduction:**

HG325N (4GE+1POTS+WiFi 4 XPON HGU ONT) is a broadband access device specially designed to meet the needs of fixed network operators for FTTH and triple play services.

The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n WiFi 4 technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the VSOL OLT.

The ONT has high reliability, is easy to manage and maintain, and has QoS guarantees for various services. It conforms to a series of international technical standards such as IEEE802.3ah and ITU-T G.984.

**Application Chart:**

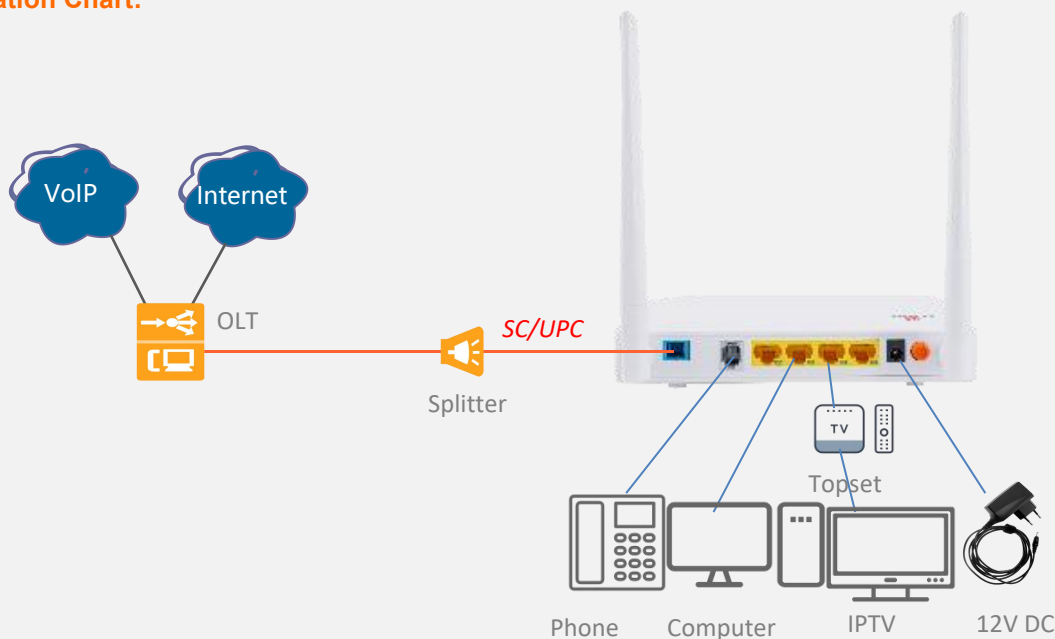

## ○ Hardware Parameter

|                     |   |
|---------------------|---|
| Dimension           | 205mm×140mm×37mm(L×W×H)   |
| Net weight          | 0.34Kg  |
| Operating condition | <ul style="list-style-type: none"> <li>• Operating temp: -10 ~ +55°C</li> <li>• Operating humidity: 5 ~ 95% (non-condensing)</li> </ul> |
| Storing condition   | <ul style="list-style-type: none"> <li>• Storing temp: -40 ~ +70°C</li> <li>• Storing humidity: 5 ~ 95% (non-condensing)</li> </ul>     |
| Power adapter       | DC 12V, 1/1.5A, external AC-DC power adaptor  |
| Power supply        | ≤10W  |
| Interfaces          | 4GE+1POTS+WiFi 4  |
| Indicators          | PWR, PON, LOS, WAN, FXS, ETH1~EH4, WPS, WIFI  |

## ○ Interface Parameter

|                |   |
|----------------|---|
| PON interface  | <ul style="list-style-type: none"> <li>• 1XPON port(EPON PX20+ &amp; GPON Class B+)</li> <li>• SC single mode, SC/UPC connector</li> <li>• TX optical power: 0~+4dBm</li> <li>• RX sensitivity: -27dBm</li> <li>• Overload optical power: -3dBm(EPON) or -8dBm(GPON)</li> <li>• Transmission distance: 20KM</li> <li>• Wavelength: TX 1310nm, RX1490nm</li> </ul> |
| WiFi interface | <ul style="list-style-type: none"> <li>• Compliant with IEEE802.11b/g/n</li> <li>• Rate up to 300Mbps, 2T2R, 5dBi external antenna</li> <li>• Support: multiple SSID</li> <li>• Support 13 Channels</li> </ul>  |
| LAN interface  | 4*GE, Auto-negotiation, RJ45 ports  |
| Pots interface | 1*FXS, RJ11 connector   |

## ○ Function Data

|              |   |
|--------------|---|
| XPON mode    | Dual mode , Can access EPON/GPON OLTs(HUAWEI,ZTE,FiberHome, etc).   |
| Connect Mode | Routing mode.   |
| WiFi         | <ul style="list-style-type: none"> <li>• IEEE802.11b/g/n(TX power:17dBm/16dBm/15dBm)</li> <li>• WiFi Authentication : WEP/WAP-PSK(TKIP) /WAP2-PSK(AES)</li> </ul>   |
| Firewall     | DDOS, Filtering Based on ACL/MAC/URL.   |
| Layer2       | 802.1D&802.1ad bridge, 802.1p Cos, 802.1Q VLAN.   |
| Layer3       | IPv4/IPv6, DHCP Client/Server , PPPoE, NAT , DMZ ,DDNS.   |
| Multicast    | IGMP v1/v2/v3 , IGMP snooping.  |
| Security     | Flow & Storm control, Loop Detection.   |
| VoIP         | <ul style="list-style-type: none"> <li>• SIP and IMS SIP</li> <li>• G.711a/G.711u/G.722/G.729 Codec</li> <li>• Echo cancellation, VAD/CNG,DTMF Relay</li> <li>• T.30/T.38 FAX</li> <li>• Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference</li> <li>• Line testing according to GR-909</li> </ul> |
| O&M          | <ul style="list-style-type: none"> <li>• WEB/TELNET/OAM/OMCI/TR069</li> <li>• Support private OAM/OMCI protocol</li> <li>• Unified network management of VSOL OLT</li> </ul>  |

| Product Name | Product Description | Accessories         |
|--------------|---------------------|---------------------|
| HG325N       | 4GE+1POTS+WiFi 4    | 12V/1.5A DC Adapter |