




# HG326N

1\*XPON+1GE+3FE+2POTS+WiFi 4+USB 2.0 HGU ONT

### Key Features:



Realtek Chipset  
High Performance Solution



XPON Dual Mode  
Automatically Access to  
EPON/GPON



2×POTS HD VoIP  
SIP Protocol



Powerful Firewall


### Introduction:

HG326N (1GE+3FE+2POTS+ WiFi 4+USB2.0 XPON HGU ONT) is a broadband access device specially designed to meet the needs of fixed network operators for FTTH and triple play services.

The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n WiFi 4 technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the VSOL OLT.

The ONT has high reliability, is easy to manage and maintain, and has QoS guarantees for various services. It conforms to a series of international technical standards such as IEEE802.3ah and ITU-T G.984.

### Application Chart:

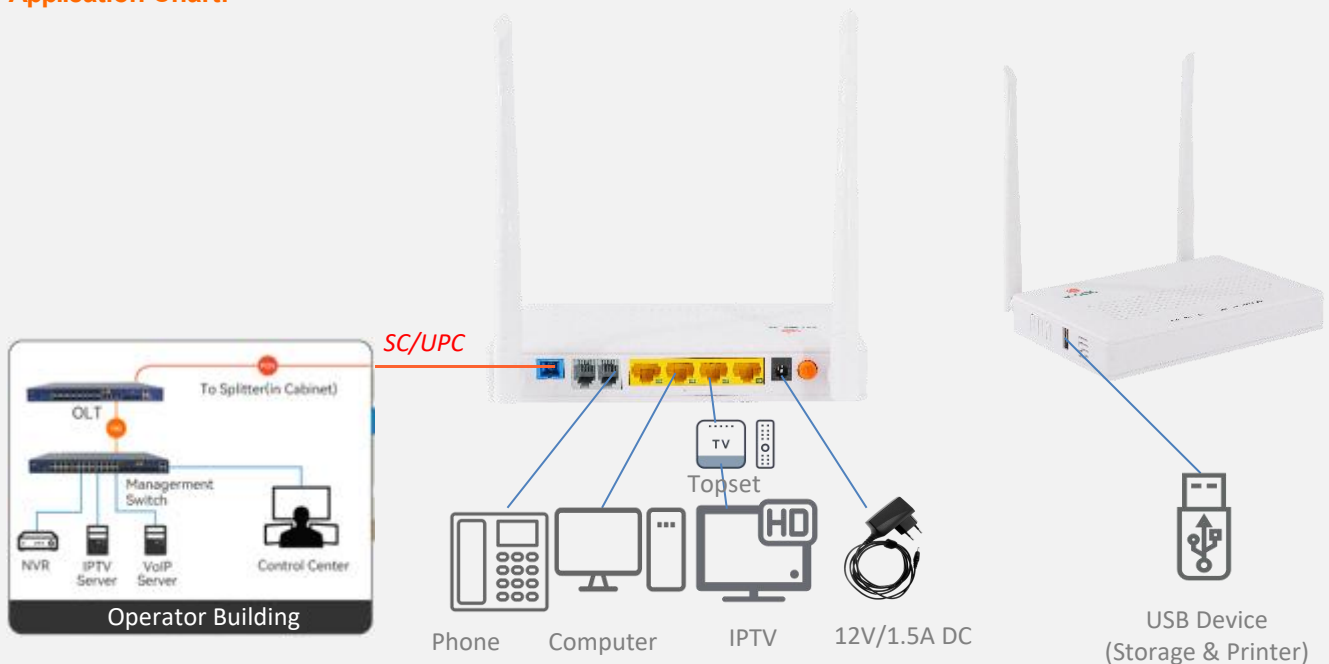

## ○ Hardware Parameter

Dimension	205mm×140mm×37mm(L×W×H)
Net weight	0.34Kg
Operating condition	<ul style="list-style-type: none"> <li>Operating temp: -10 ~ +55°C</li> <li>Operating humidity: 5 ~ 95% (non-condensing)</li> </ul>
Storing condition	<ul style="list-style-type: none"> <li>Storing temp: -40 ~ +70°C</li> <li>Storing humidity: 5 ~ 95% (non-condensing)</li> </ul>
Power adapter	DC 12V, 1.5A, AC-DC power adaptor
Power supply	≤18W
Interfaces	• 1GE+3FE+2POTS+WiFi 4+USB2.0
Indicators	• PWR, PON, LOS, WAN, FXS, ETH1~EH4, WPS

## ○ Interface Parameter

PON interface	<ul style="list-style-type: none"> <li>1XPON port(EPON PX20+ &amp; GPON Class B+)</li> <li>SC single mode, SC/UPC connector</li> <li>TX optical power: 0~+4dBm</li> <li>RX sensitivity: -27dBm</li> <li>Overload optical power: -3dBm(EPON) or -8dBm(GPON)</li> <li>Transmission distance: 20KM</li> <li>Wavelength: TX 1310nm, RX1490nm</li> </ul>
WiFi interface	<ul style="list-style-type: none"> <li>Compliant with IEEE802.11b/g/n</li> <li>Rate up to 300Mbps, 2T2R, 5dBi external antenna</li> <li>Support: multiple SSID</li> <li>Support 13 Channels</li> </ul>
LAN interface	1*GE+ 3*FE Auto-negotiation RJ45 ports
POTS interface	2×FXS, RJ11 connector
USB interface	USB 2.0 for Shared Storage/Printer

## ○ Product Feature

XPON Mode	Dual mode , Can access EPON/GPON OLTs(HUAWEI,ZTE,FiberHome, etc).
Software mode	Routing mode.
WiFi	<ul style="list-style-type: none"> <li>IEEE802.11b/g/n(TX power: 17dBm/16dBm/15dBm)</li> <li>WiFi Authentication : WEP/WAP-PSK(TKIP) /WAP2-PSK(AES)</li> </ul>
Firewall	DDOS, Filtering Based on ACL/MAC/URL.
Layer2	802.1D&802.1ad bridge, 802.1p Cos, 802.1Q VLAN.
Layer3	IPv4/IPv6, DHCP Client/Server , PPPoE, NAT , DMZ ,DDNS.
Multicast	IGMP v1/v2/v3/snooping.
Security	Flow & Storm control, Loop Detection.
VoIP	<ul style="list-style-type: none"> <li>SIP and IMS SIP</li> <li>G.711a/G.711u/G.722/G.729 Codec</li> <li>Echo cancellation,VAD/CNG,DTMF</li> <li>T.30/T.38 FAX</li> <li>Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference</li> <li>Line testing according to GR-909</li> </ul>
O&M	<ul style="list-style-type: none"> <li>WEB/TELNET/OAM/OMCI/TR069</li> <li>Support private OAM/OMCI protocol</li> <li>Unified network management of VSOL OLT</li> </ul>

Product Name	Product Description	Accessories
HG326N	1GE+3FE+2POTS+WiFi4+USB 2.0	12V/1.5A DC Adapter