


HG3232AX30T-A

1XPON+4LAN+1POTS+1USB3.0+CATV+WiFi6 HGU ONT

Key Features:




High Performance Solution



Next-Gen Gigabit WiFi6
2.4GHz & 5GHz Dual Band
Speed up to 3Gbps



Tray-mounted Fiber
Structure
Triple-play Services



Black/White Color Shell
Optional


Introduction:

HG3232AX30T-A (4GE+1POTS+CATV+WiFi6 XPON HGU ONT) is a broadband access device designed to meet the demands of fixed network operators for FTTH and triple-play services.

This ONT is based on a high-performance chip solution, supporting XPON dual-mode technology (EPON and GPON). With WiFi speeds of up to 3000Mbps, it also supports IEEE 802.11b/g/n/ac/ax WiFi 6 technology and other Layer 2/Layer 3 features, providing data services for carrier-grade FTTH applications. In addition, this ONT supports OAM/OMCI protocols, allowing configuration and management of various services on the VSOL OLT, making it easy to manage and maintain, and ensuring QoS for various services. It complies with international technical standards such as IEEE802.3ah and ITU-T G.984.

The HG3232AX30T-A comes in two color options for its body shell, black and white. With a bottom disc fiber structure design, it can be placed on a desktop or wall-mounted, adapting effortlessly to various scene styles!

Application Chart:

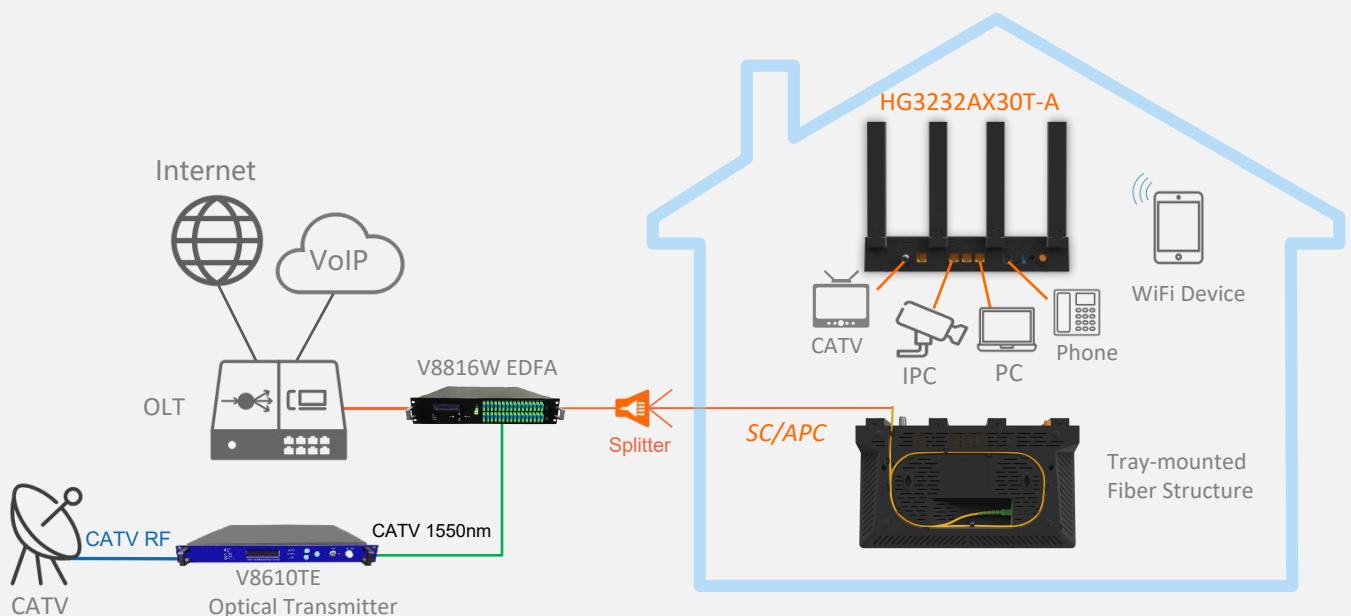

○ Hardware Parameter

Dimension	260.4mm×157.4mm×45.8mm(L×W×H)
Net weight	0.55Kg
Operating condition	Operating temp: -10 ~ +55°C Operating humidity: 5 ~ 95% (non-condensed)
Storing condition	Storing temp: -40 ~ +70°C Storing humidity: 5 ~ 95% (non-condensed)
Power adapter	12V/1.5A
Power supply	≤18W
Interface	1XPON+4GE+1POTS+1USB3.0+CATV+WiFi6
Indicators	PWR ,PON ,LOS ,WAN ,LAN1~4 ,2.4G ,5G , WPS ,FXS ,USB ,CATV


○ Interface parameter

PON Interface	<ul style="list-style-type: none"> • 1XPON port(EPON PX20+ and GPON Class B+) • SC single mode, SC/APC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
User interface	<ul style="list-style-type: none"> • 4×GE, Auto-negotiation,RJ45 ports • 1×POTS RJ11 Connector
Antenna	2.4GHz 2T2R , 5GHz 3T3R
CATV interface	<ul style="list-style-type: none"> • Optical receiving wavelength: 1550±10nm • Optical input range: +2~-18dBm • Optical reflection loss: ≥40dB • RF frequency range: 47~1000MHz • RF output impedance: 75Ω • RF output level and AGC range: ≥81±2dBuV@+1~-10dBm ≥79±2dBuV@ 0~-11dBm ≥77±2dBuV@-1~-12dBm ≥75±2dBuV@-2~-13dBm ≥73±2dBuV@-3~-14dBm ≥71±2dBuV@-4~-15dBm • MER: ≥32dB(-14dBm optical input)

○ Function Data

O&M	<ul style="list-style-type: none"> • WEB/TELNET/OAM/OMCI/TR069 • Support private OAM/OMCI protocol
Internet connection	Support Routing Mode
Multicast	<ul style="list-style-type: none"> • IGMP v1/v2/v3, IGMP snooping • MLD v1/v2 snooping
VoIP	<ul style="list-style-type: none"> • SIP and IMS SIP • G.711a/G.711u/G.722/G.729 Codec • Echo cancellation,VAD/CNG,DTMF Relay • T.30/T.38 FAX • Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference • Line testing according to GR-909
WIFI	<ul style="list-style-type: none"> • WiFi6: 802.11a/n/ac/ax 5GHz, 2.4GHz • WiFi: 2.4GHz 2×2, 5GHz 3×3, 5 antenna(4*External antenna,1*Internal antenna), rate up to 3Gbps,Multiple SSID • WiFi Encryption: WPA/WPA2/WPA3 • Support OFDMA, MU-MIMO, Dynamic QoS, 1024-QAM • Smart Connect for one Wi-Fi name - One SSID for 2.4GHz and 5GHz dual band
L2	802.1p Cos,802.1Q VLAN
L3	IPv4/IPv6, DHCP Client/Server,PPPoE, NAT, DMZ, DDNS
Firewall	Anti-DDOS, Filtering Based on ACL/MAC /URL


Product Name	Product Description	Accessories
HG3232AX30T-A	1XPON+4*GE+1POTS+1USB3.0+CATV+WiFi6	AC-DC power adaptor: DC12V / 1.5A

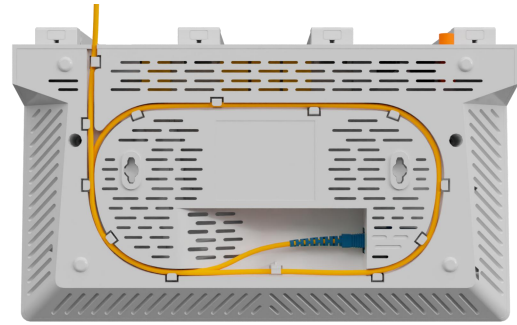

HG3232AX30-A

1XPON+4LAN+1POTS+1USB3.0+WiFi6 HGU ONT

Key Features:




High Performance Solution



Next-Gen Gigabit WiFi6
2.4GHz & 5GHz Dual Band
Speed up to 3Gbps



Tray-mounted Fiber
Structure
Triple-play Services



Black/White Color Shell
Optional


Introduction:

HG3232AX30-A (4GE+1POTS+WiFi6 XPON HGU ONT) is a broadband access device designed to meet the demands of fixed network operators for FTTH and triple-play services.

This ONT is based on a high-performance chip solution, supporting XPON dual-mode technology (EPON and GPON). With WiFi speeds of up to 3000Mbps, it also supports IEEE 802.11b/g/n/ac/ax WiFi 6 technology and other Layer 2/Layer 3 features, providing data services for carrier-grade FTTH applications. In addition, this ONT supports OAM/OMCI protocols, allowing configuration and management of various services on the VSOL OLT, making it easy to manage and maintain, and ensuring QoS for various services. It complies with international technical standards such as IEEE802.3ah and ITU-T G.984.

The HG3232AX30-A comes in two color options for its body shell, black and white. With a bottom disc fiber structure design, it can be placed on a desktop or wall-mounted, adapting effortlessly to various scene styles!

Application Chart:

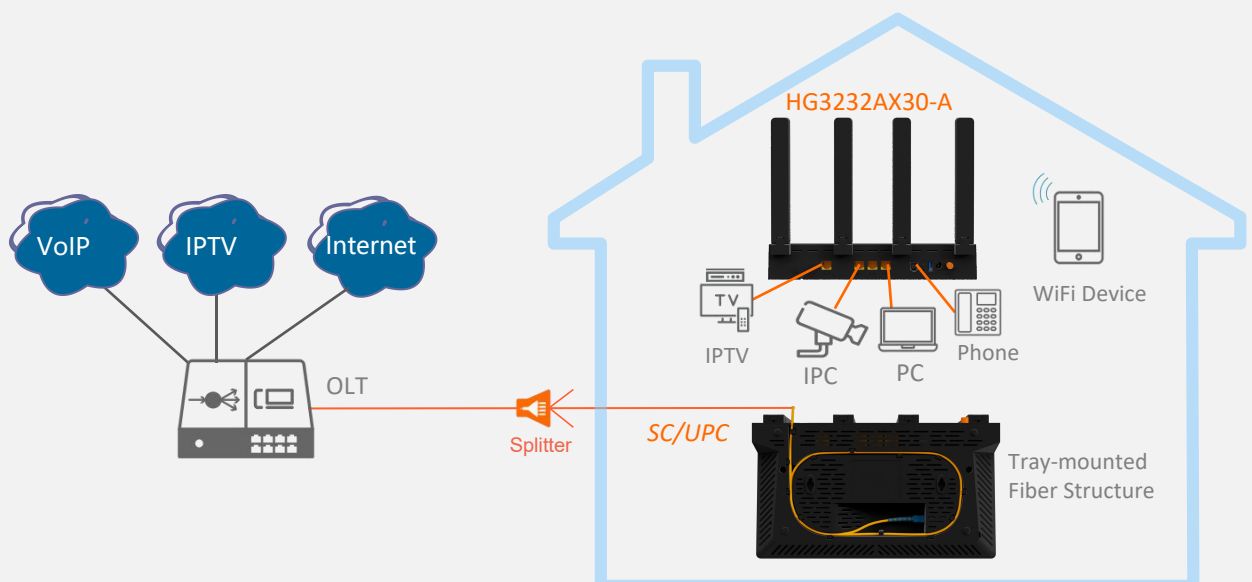

○ Hardware Parameter

Dimension	260.4mm×157.4mm×45.8mm(L×W×H)
Net weight	0.55Kg
Operating condition	Operating temp: -10 ~ +55°C Operating humidity: 5 ~ 95% (non-condensed)
Storing condition	Storing temp: -40 ~ +70°C Storing humidity: 5 ~ 95% (non-condensed)
Power adapter	12V/1.5A
Power supply	≤18W
Interface	1XPON+4GE+1POTS+1USB3.0+WiFi6
Indicators	PWR ,PON ,LOS ,WAN ,LAN1~4 ,2.4G ,5G , WPS ,FXS ,USB

○ Interface parameter

PON Interface	<ul style="list-style-type: none"> • 1XPON port(EPON PX20+ and GPON Class B+) • SC single mode, SC/UPC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
User interface	<ul style="list-style-type: none"> • 4×GE, Auto-negotiation,RJ45 ports • 1×POTS RJ11 Connector
Antenna	2.4GHz 2T2R , 5GHz 3T3R

○ Function Data

O&M	<ul style="list-style-type: none"> • WEB/TELNET/OAM/OMCI/TR069 • Support private OAM/OMCI protocol
Internet connection	Support Routing Mode
Multicast	<ul style="list-style-type: none"> • IGMP v1/v2/v3, IGMP snooping • MLD v1/v2 snooping
VoIP	<ul style="list-style-type: none"> • SIP and IMS SIP • G.711a/G.711u/G.722/G.729 Codec • Echo cancellation,VAD/CNG,DTMF Relay • T.30/T.38 FAX • Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference • Line testing according to GR-909
WIFI	<ul style="list-style-type: none"> • WIFI6: 802.11a/n/ac/ax 5GHz, 2.4GHz • WiFi: 2.4GHz 2×2, 5GHz 3×3, 5 antenna(4*External antenna,1*Internal antenna), rate up to 3Gbps,Multiple SSID • WiFi Encryption: WPA/WPA2/WPA3 • Support OFDMA, MU-MIMO, Dynamic QoS, 1024-QAM • Smart Connect for one Wi-Fi name - One SSID for 2.4GHz and 5GHz dual band
L2	802.1p Cos,802.1Q VLAN
L3	IPv4/IPv6, DHCP Client/Server,PPPoE, NAT, DMZ, DDNS
Firewall	Anti-DDOS, Filtering Based on ACL/MAC /URL

Product Name	Product Description	Accessories
HG3232AX30-A	1XPON+4*GE+1POTS+1USB3.0+WiFi6	AC-DC power adaptor: DC12V / 1.5A